


Redi-Purge™ *Ultra-High Efficiency*

Centrifugal Chiller "Gravity Flow" Purge Unit

Virtual "Drop-in Replacement" for Trane's™ Purifier® purger

Can be used to replace Trane's™ EarthWise™ purger*

** When used with optional Carbon Canister...*

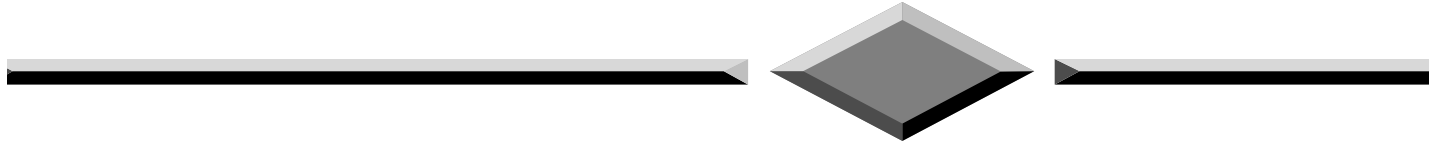

Features & Benefits:

- Replaces "Gravity Flow" purge units
- Ultra-High efficiency at a reasonable price
- Easily connects to existing purge lines
- Mounts to existing mounting brackets
- Microprocessor-based controller
- Extensive operational LOGS
- Advanced diagnostics
- Operates independent of chiller operating status
- Optional carbon collection canister

Purge Efficiency...

Expels only .59 lbs CFC per lb. air removed. With optional Carbon Canister only .0049 lbs CFC per lb. air removed...

Models 007-11-C3 / 007-123-C3



ETL Listed 3104248



SPECIFICATIONS

| | |
|-----------------------------------|--|
| COMPRESSOR..... | 1/3 hp |
| PURGE TEMPERATURE..... | 0° F |
| ELECTRICAL..... | 103-127 VAC 60 Hz / 99-121 VAC 50 Hz |
| FUSED CIRCUIT..... | 15 Amp |
| FAULT RELAY..... | Form C contact rating 120 VAC / 10 Amp |
| OPERATING ENVIRONMENT..... | 40° F to 120° F |
| DIMENSIONS..... | 20" H x 16 W x 25" L |
| WEIGHT..... | 110 lbs (shipping 140 lbs) |
| REFRIGERANT..... | R-404A |
| PIPING CONNECTIONS..... | Gas Inlet 5/8" O.D. / Liquid Outlet 1/2" O.D |
| Carbon Canister (optional) | |
| CARBON CANISTER..... | equivalent to 50lb recovery cylinder |
| WEIGHT..... | 65 lbs (shipping weight 75 lbs) |